
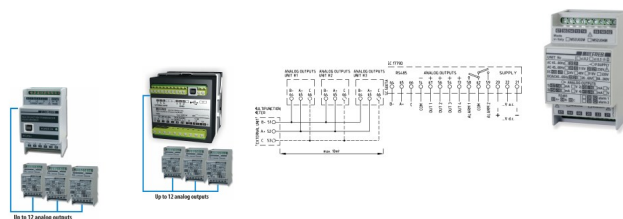


M52U

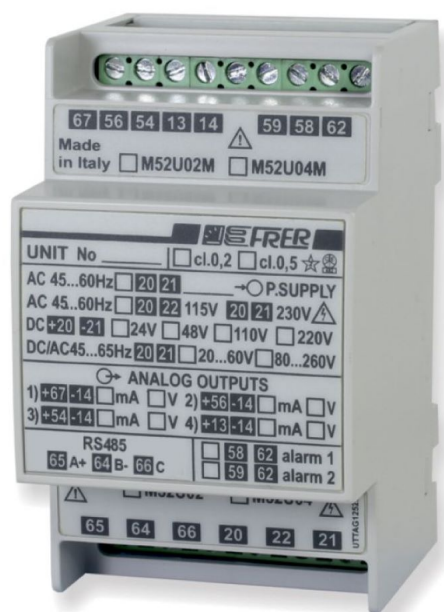

????? ?????? modules with 2 or 4 analogue outputs allow ????: CL;0,5 (0,2 opzionale - optional)* ????: 260-80 Vac/dc , 115-230 VAC , 20-260VAC 2 Alarm outputs

???? ?????: ??? ???? ???? ????
????

[?? ???? ?????? ?? ????? ?????](#)

???

Code:

Programmable analog output modules with 2 outputs for FRER Network AnalyzersM52U02?

Programmable analog output modules with 4 outputs for FRER Network AnalysersM52U04?

Description

Analogue outputs modules M52U... with 2 or 4 outputs are designed to be connected to FRER multifunction meters to generate a maximum of 12 analogue outputs (using max. 3 modules with 4 outputs) proportional to as many variables measured by the meter itself. In addition, on each module two alarm outputs are available on request. Each analogue output, as each alarm output, is fully and independently programmable on

site.

???????? ??

???? ????? ????? ?? ????? ????? ?????.

// //