


PIRA T8 DE

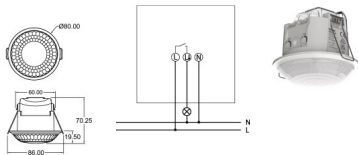

?? ???? : 1030200 ???? ???? ???? ???? ???? ???? ???? : 360 ???? ???? ???? : 2-3??? 5-1000 lx : ???? ???? ???? ???? ???? ????
????? ???? : 5 ???? ???? 15 ???? V AC 230 : ???? ???? IP 21: ???? ???? ?

???? ???? : ???? ???? ???? ????
????

[?? ???? ???? ???? ???? ???? ???? ?](#)

???

Function description

- ?Motion detector/Presence detector (PIR) for recess ceiling installation indoors
 - ?Circular detection area 360°, up to Ø 8 m (50 m2) at mounting height 2.5 m
 - ?1 channel light (Relay, 230 V)
- ?Automatic motion and brightness-dependent control for lighting
 - ?Mixed light measurement
 - ?Operation as fully automatic device
 - ?Brightness switching value configurable
 - ?Time delay configurable
- ?Plug-in terminals: Quick and easy connection thanks to plug-in terminals optimally installed at a 45° angle in the indoor detectors.
- ?Ready for immediate operation thanks to factory presetting (brightness switching value 100 lux, switch-off delay 2 min)

???????? ??

???? ???? ???? ??? ????? ???? ?????.

// //